

→ Night&day maritime surveillance



Spynel-S

WIDE AREA SURVEILLANCE SYSTEM

360° INTRUSION DETECTION, ANYWHERE, ANYTIME

Spynel is the impressive system for all-weather, 24/7 surveillance of ports, ships, platforms at sea, ideal for perimeters over several kilometers. This unique infrared sensor displays a full 360-degree panorama, with a resolution up to 30 Mpix. With its near real-time imagery, Spynel detects and tracks unlimited movements night and day. With a large MWIR focal plane array, Spynel-S exhibits high performance, especially in warm and humid regions.

EARLY WARNING OF ASSYMETRICAL THREATS

Compact and fully passive, the Spynel is completely insensitive to jamming and deception. Unaffected by sea clutter, this surveillance device is highly effective when tracking small crafts, RIBs, wooden boats and swimmers. It can be a reliable and cost-effective stand-alone perimeter security solution as well as an added layer of capability to systems already in place.



→ SPYNEL-S ROTATING SENSOR

APPLICATIONS

- Maritime wide area surveillance
- Asymmetrical threats detection
- Seaports and harbors protection
- Coastal and border passive surveillance
- Offshore platforms and oil rigs security
- UAV, USV, low air target tracking
- Auto-protection of ships
- Fight against piracy
- Fight against smuggling and drug trafficking
- Night time navigation
- Search and rescue



→ RIBs detection and tracking



→ Asymmetric threats detection

BENEFITS


- Cost effective and reliable surveillance against asymmetric threats
- Full 360-degree panoramic coverage with a single sensor
- Long range surveillance up to the horizon
- Day and night panoramic awareness even in adverse weather conditions
- Automatic, simultaneous tracking of all threats with superior image quality
- Compact, robust, lightweight equipment, for a fast deployment
- Fully passive system, totally undetectable unlike radar
- Gyro-stabilization option for shipborne installations



Spynel-S

WIDE AREA

SURVEILLANCE SYSTEM

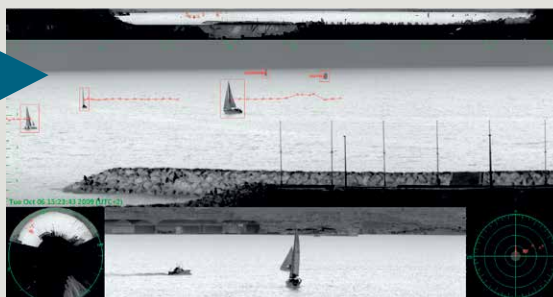




→ 360-degree site security

→ Tracks displayed on situation map

TECHNICAL

SENSOR

	Spynel-S 2000	Spynel-S 3500	Spynel-S 6000
Vertical FOV	20°	10°	5°
Horizontal FOV	360°	360°	360°
IFOV	0.6 x 0.6 mrad x mrad	0.3 x 0.3 mrad x mrad	0.15 x 0.15 mrad x mrad
Scanning speed	1 rps (360°/sec)	1 rps (360°/sec)	up to 1 rps (360°/sec)
Detector type	MWIR 640x512 FPA	MWIR 640x512 FPA	MWIR 640x512 FPA
Cooling	Stirling cooler	Stirling cooler	Stirling cooler
Image resolution	11 500 (H) x 640 (V)	23 000 (H) x 640 (V)	46 000 (H) x 640 (V)
Video output and control	IP	IP	IP
Dimensions (Dia x H)	385 mm x 580 mm	385 mm x 580 mm	385 mm x 580 mm
Weight	< 40 kg	< 40 kg	< 40 kg
Operating temperature	-40°C to +71°C	-40°C to +71°C	-40°C to +71°C
Protection standard	IP 66	IP 66	IP 66
Power supply	24V DC / 10 Amps	24V DC / 10 Amps	24V DC / 10 Amps
Detection range for			
human: 	Up to 2 km	Up to 3.5 km	Up to 6 km
RIB: 	Up to 4.5 km	Up to 7 km	Up to 12 km
ship: 	Up to 18 km	Up to 21 km	Up to 25 km

CONTROL AND DISPLAY SOFTWARE

Operating system: PC Windows – multiple screen and touch screen capabilities

Software functions: Get full advantage of Spynel sensor with Cyclope software. Cyclope provides, at a glance, **real time panoramic display** (360° strip, annular, radar & zoom views), **unlimited targets designation and tracking**, immediate **threat location** (azimuth, elevation, distance), GPS, AIS and radar **data integration**, automatic control of PTZ systems for target identification, **forensic capabilities** (timeline, sequence storage and playback), spatial and temporal **bookmarks**, multiple threats displayed on **situation map**, fine **image stabilization** and more...

Above information is subject to changes without notice

