



→ SPYNEL perimeter security

Spynel-U


WIDE AREA SURVEILLANCE SYSTEM

360° INTRUSION DETECTION, ANYWHERE, ANYTIME

Spynel is a unique wide-area surveillance system, acquiring real-time full panoramic images with automatic intrusion detection and tracking capabilities. It provides powerful situational awareness through 360 degree visualization of the surroundings. As a completely passive system, it is invisible to intruders, not vulnerable to jamming nor camouflage, and operates 24/7, whatever the weather. The Spynel-U is the uncooled IR version of the Spynel series.

EARLY TARGET DISCRIMINATION FOR FAST REACTION

Robust and cost effective, the Spynel-U is the ideal surveillance solution for commercial applications such as airport, port or critical infrastructure perimeter monitoring. One single sensor can monitor large areas and perform multi-events automatic detection in total darkness, fog and smoke, thanks to the 360-degree thermal camera. An unlimited number of targets can be simultaneously tracked, recognized and identified, thanks to the integrated 360-degree visible camera. The Spynel-U does not require any cryogenic cooler, which ensures long-term reliability and maintenance-free operation.

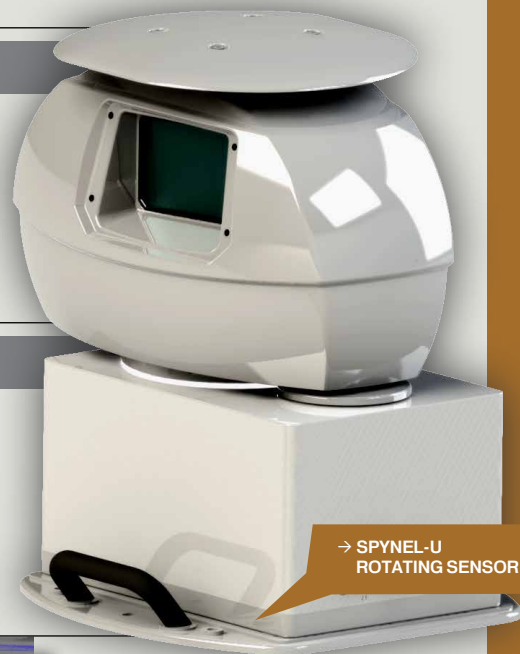

→ SPYNEL-U ROTATING SENSOR

APPLICATIONS

- Persistent wide area surveillance
- 24/7 perimeter security
- 360° asymmetrical threats detection
- Airport / airfield surveillance
- Critical infrastructure protection
- Border and coastal passive surveillance
- Port monitoring



→ Infrared panoramic detection and visible identification with the same sensor

BENEFITS

- Cost effective and reliable surveillance against asymmetric threats
- Full 360-degree panoramic coverage with a single sensor
- Day and night panoramic scrutiny even in adverse weather conditions
- Automatic, simultaneous tracking of all threats with superior image quality
- Compact, robust, lightweight equipment, for a fast deployment
- Fully passive system, totally undetectable unlike radar
- Maintenance-free uncooled LWIR detector



→ SPYNEL night&day intrusion detection


Spynel-U

PANORAMIC INFRARED


VISION SYSTEM



SPYNEL
ref. SPU-Len-acl

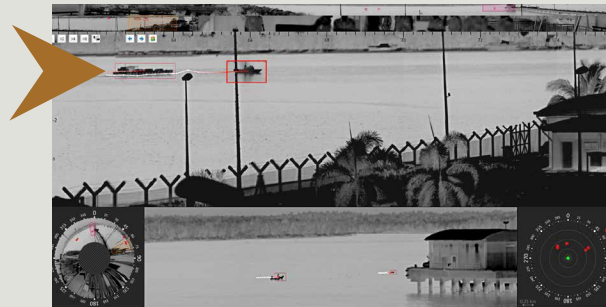

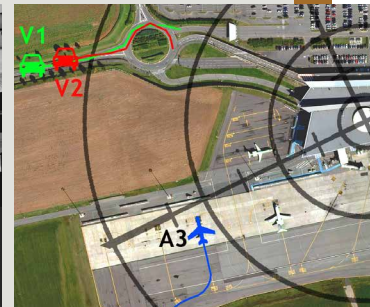


→ 360-degree port surveillance



→ Tracks displayed on situation map

TECHNICAL

SENSOR

	Spynel-U 1000	Spynel-U 2500
Vertical Field Of View	18° (-15° to +3°)	10°
Horizontal Field Of View	360°	360°
Scanning speed	0.5 rps (360° / 2sec)	0.25 rps (360° / 4sec)
Infrared detector type	640 x 512 Uncooled LWIR FPA	640 x 512 Uncooled LWIR FPA
Infrared image resolution	10 000 (Horizontal) x 512 (Vertical)	18 000 (Horizontal) x 512 (Vertical)
Visible detector type (option)	1620 x 1220 pixels	1620 x 1220 pixels
Visible image resolution	26 000 (Horizontal) x 1220 (Vertical)	47 000 (Horizontal) x 1220 (Vertical)
Video output and control	TCP/IP	TCP/IP
Dimensions (Diameter x Height)	350 mm x 600 mm	350 mm x 600 mm
Weight	20 kg	20 kg
Protection standard	IP 67	IP 67
Power supply	24V DC / 6 Amps max at startup	24V DC / 6 Amps max at startup
Detection range for		
human : 	Up to 1 km	Up to 2.5 km
car : 	Up to 1.5 km	Up to 4 km
Ship : 	Up to 6 km	Up to 15 km

CONTROL AND DISPLAY SOFTWARE

Operating system: PC Windows – multiple screen and touch screen capabilities

Software functions: Get full advantage of Spynel sensor with Cyclope software. Cyclope provides, at a glance, **real time panoramic display** (360° strip, annular, radar & zoom views), **3D detection** capabilities, **unlimited targets designation and tracking**, immediate threat location (azimuth, elevation, distance), GPS, AIS and radar **data integration**, automatic control of PTZ systems for target identification, **forensic capabilities** (timeline, sequence storage and playback), spatial and temporal bookmarks, multiple threats displayed on situation map, fine image stabilization and more...

Above information is subject to changes without notice



HGH SYSTEMES INFRAROUGES

10 rue Maryse Bastié
91430 IGNY - FRANCE

TEL: +33 1 69 35 47 70 - FAX: +33 1 69 35 47 80
E-MAIL: HGH@HGH.FR



WWW.HGH.FR